

ACOUSTICAL PANELS - Perforated Vinyl Wrapped

Panel Composition:

6-7 pcf compressed fiberglass core, containing up to 60% post consumer recycled glass as a percent of glass weight as certified by fiberglass manufacturer. Chemically hardened edges.

Sizes:

Custom sizes available up to 48" X 120". Custom shape and design options also available.

Finishes:

Select from Vertical Interior Solutions approved perforated vinyls. Typical open area of 18.5%. C.O.M. accepted after approval of suitability.

Mounting Methods:

Adhesive & Finish Nail, Impaling Clips, Z-Clips, Rotofast Anchors, Edge Clips, Hook & Loop

Fire Rating:

All panel components meet or exceed Class "A" requirements as determined by ASTM E-84 Tunnel Test.


Warranty:

All products are warranted against workmanship and manufacturing defects for two (2) years from date of purchase.


Edge Detail:



Bevel



Square





Mitre



Radius

Perforation

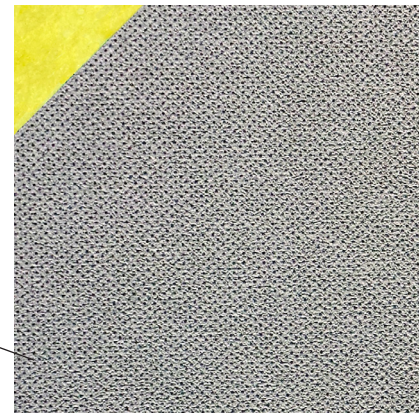

Product #	Thickness	Absorption Coefficients				NRC	R Value	K Factor
		250 Hz	500 Hz	1000 Hz	2000 Hz			
APS-100	1"	0.27	0.76	1.01	1.08	0.80	4.5	0.22
APS-150	1 1/2"	0.81	1.05	0.97	0.93	0.95	6.8	0.22
APS-200	2"	0.89	1.12	1.05	1.04	1.05	9	0.22