

FINECOAT COATED PANEL

Panel Composition:

1 1/2" Ecocore - 100% Polyester (60% PET-Recycled Fiber, 40% PET-Virgin Fiber) with 60 gram EVO-60 liner.

Sizes:

Custom sizes available up to 48" X 120". Custom shape and design options also available.

Finishes:

Factory applied acrylic Finecoat. Durable, breathable and washable surface. Available in 288 standard colors.

Mounting Methods:

Adhesive & Finish Nail, Z-Clips, Edge Clips, Hook & Loop


Fire Rating:

All panel components meet or exceed Class "B" requirements as determined by ASTM E-84 Tunnel Test.

Warranty:

All products are warranted against workmanship and manufacturing defects for two (2) years from date of purchase.

Frequency in Hz	Absorption in Sabins	Absorption Coefficient
100	18.6	0.26
125	24.7	0.34
160	32.2	0.45
200	36.8	0.51
250	50.8	0.71
315	63.0	0.88
400	63.4	0.88
500	70.2	0.98
630	75.9	1.05
800	76.6	1.06
1000	74.6	1.04
1250	75.5	1.05
1600	72.9	1.01
2000	70.4	0.98
2500	66.4	0.92
3150	62.6	0.87
4000	60.4	0.84
5000	63.1	0.88

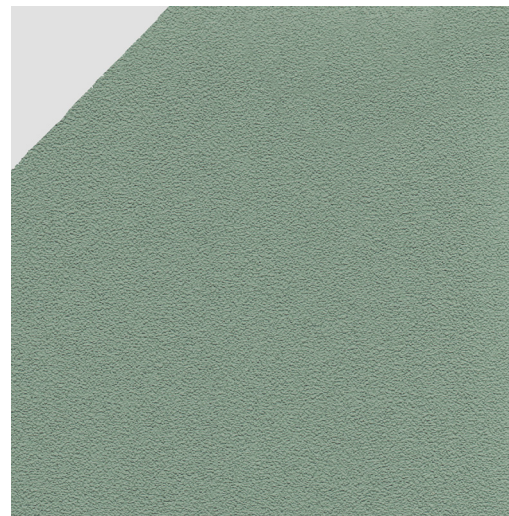

NRC = 0.95 SAA = 0.92
R Value = 5.704 K Factor = 0.264